

APP CRS	Rwy Idg	7702
021°	TDZE	599
	Apt Elev	599

RNAV (RNP) Z RWY 2L
NASHVILLE INTL (BNA)

T For uncompensated Baro-VNAV systems, procedure NA below -11°C (13°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized with Rwy 2R. For inop ALSF-2, increase RNP 0.15 all Cats visibility to RVR 4700, increase RNP 0.30 all Cats visibility to 1 ¼ mile. Use of FD or AP providing RNP track guidance required during nonprecision operations.

ALSF-2



MISSED APPROACH:
Climb to 4000 on track
021° to HIKRY and hold,
continue climb-in-hold
to 4000.

D-ATIS
135.1


NASHVILLE APP CON
118.4 360.7

NASHVILLE TOWER
118.6 257.8

GND CON
121.9 348.6

CLNC DEL
126.05

CPDLC

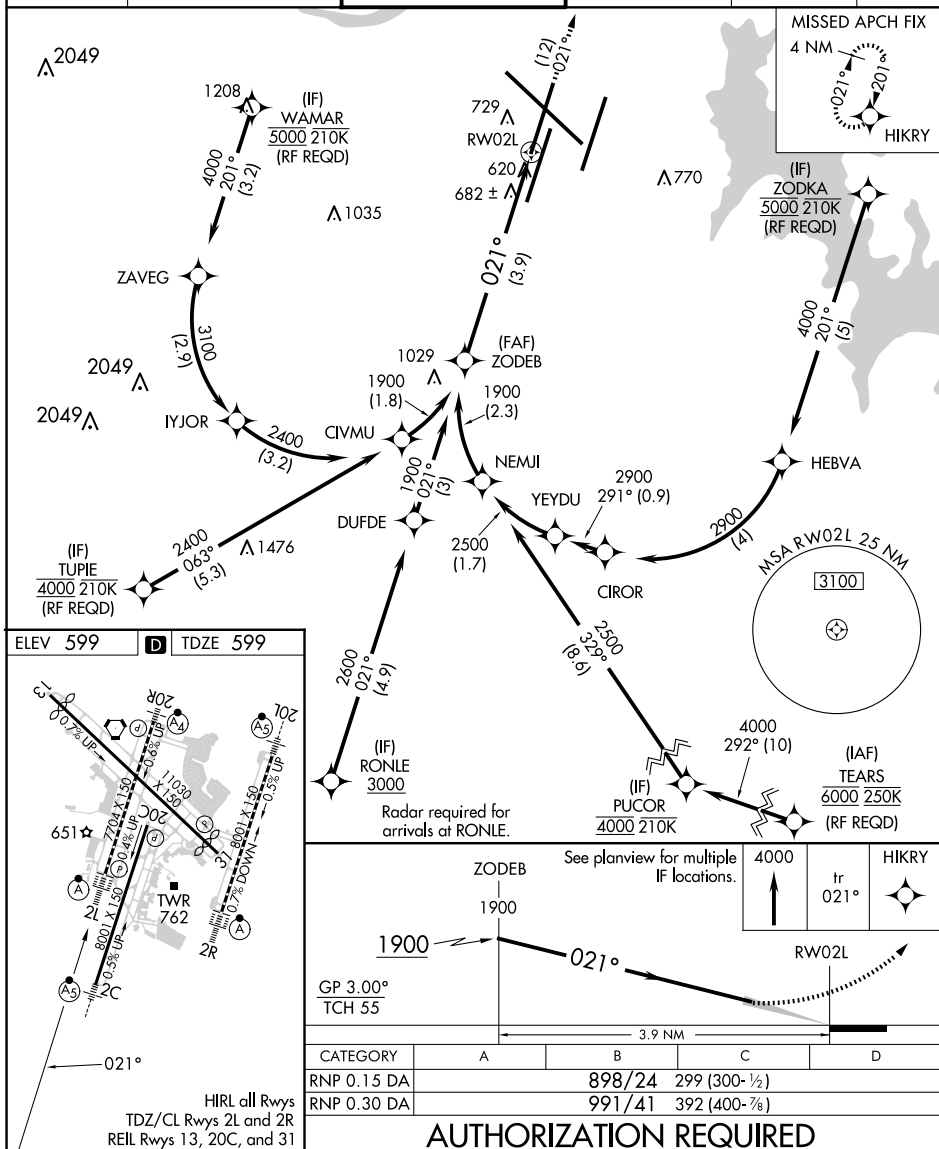

NASHVILLE, TENNESSEE
Amdt 2B 31MAR16

36°07'N-86°41'W

NASHVILLE INTL (BNA)

RNAV (RNP) Z RWY 2L

SE-1, 17 APR 2025 to 15 MAY 2025